

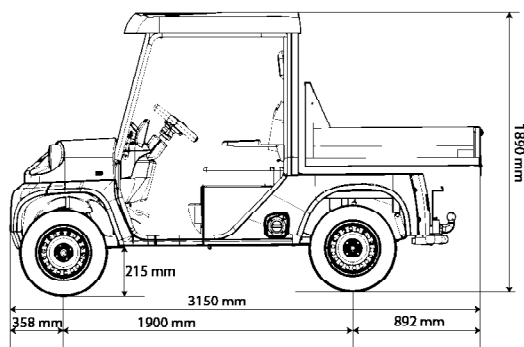


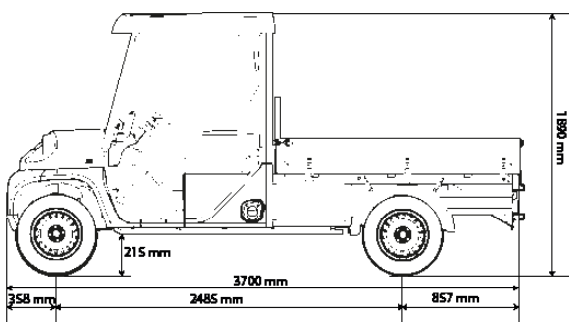

### N.30 CARGO SHORT H

\*with pickup bed 1150x1240x250 mm

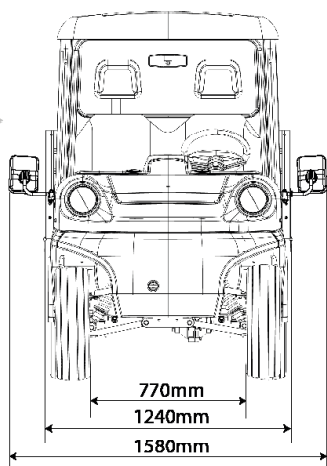

### N.30 CARGO LONG H

\*with pickup bed 1750x1240x250 mm

|                    | CARGO SHORT H                          | CARGO LONG H                           |
|--------------------|----------------------------------------|----------------------------------------|
| MOTOR              | 48V 3-phase AC                         | 48V 3-phase AC                         |
| NOMINAL POWER      | 5,0 kW                                 | 5,0 kW                                 |
| PEAK POWER         | 11,5 kW                                | 11,5 kW                                |
| MAX TORQUE         | 75 Nm                                  | 75 Nm                                  |
| MOTOR CONTROLLER   | 350A                                   | 350A                                   |
| CHASSIS            | Hot dip galvanized steel frame         | Hot dip galvanized steel frame         |
| BRAKES             | Hydraulic brakes - disc (F) & drum (R) | Hydraulic brakes - disc (F) & drum (R) |
| SUSPENSIONS        | Double wishbone (F) - Leaf spring(R)   | Double wishbone (F) - Leaf spring(R)   |
| TIRES              | 165 R13                                | 165 R13                                |
| TOW LOAD CAPACITY  | 275 kg                                 | 275 kg                                 |
| <b>PERFORMANCE</b> |                                        |                                        |
| TOP SPEED          | 43 km/h                                |                                        |

### MASS

|                                                 |              |              |
|-------------------------------------------------|--------------|--------------|
| CHASSIS PAYLOAD                                 | up to 450 kg | up to 805 kg |
| VEHICLE WEIGHT<br>(without battery and options) | 520 kg       | 515 kg       |

### DIMENSIONS

|                                   |                   |                   |
|-----------------------------------|-------------------|-------------------|
| LENGTH*                           | 3150 mm           | 3700 mm           |
| WIDTH<br>(without / with mirrors) | 1240 mm / 1580 mm | 1240 mm / 1580 mm |
| HEIGHT                            | 1890 mm           | 1890 mm           |
| WHEELBASE                         | 1900 mm           | 2485 mm           |
| OUTER TURNING<br>RADIUS           | 4000 mm           | 4700 mm           |

### PICKUP BED OPTIONS *length x width x height - material*

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| 1150 x 1240 x 250 mm - profiled alu | 1750 x 1240 x 250 mm - profiled alu |
| 1150 x 1240 x 350 mm - profiled alu | 1750 x 1240 x 350 mm - profiled alu |
| 1150 x 1240 x 250 mm - steel plate  | 1750 x 1240 x 250 mm - steel plate  |

### STANDARD FEATURES

Water filling system for Flood Lead Acid (FLA) batteries, automatic electromagnetic brake, 7-inch touch screen display, on-board diagnostics, 48V on-board battery charger, steering column mounted front and reverse (D-N-R) selector switch, LED front & rear lights, 12V output + USB charging socket, windshield with wipers, 3× cupholders, 4× storage nets in cabin, 3-point seat belts, tie-down points, heater – diesel or electric

### OPTIONAL FEATURES

Doors, power steering, tilt system, mesh cages, frame structure with a tarpaulin cover, FM or DAB radio with Bluetooth, profiled seats, reverse camera, tow hook, forward drive warning sound or AVAS system (Acoustic Vehicle Alerting System), beacons & flashing warning lights, roof bars

| BATTERY     | SHORT & LONG FLA | SHORT & LONG LI-ION |         |          |
|-------------|------------------|---------------------|---------|----------|
| CAPACITY    | T145 260Ah       | 6,2 kWh             | 9,3 kWh | 12,4 kWh |
| VOLTAGE     | 48 V             | 48 V                | 48 V    | 48 V     |
| WEIGHT      | 270 kg           | 38 kg               | 57 kg   | 76 kg    |
| CHARGE TIME | ~11 h            | ~4,5 h              | ~6,5 h  | ~9,5 h   |